PLAN SHOWING THE EXISTING BUILDING TO RUN VAMSI KRISHNA NOBLE SCHOOL ( G.F, F.F, S.F& T.F ), IN SY.NO:9-1A/D & 9-1A/C AT POTHULANAGEPALLI - VILLAGE & PANCHAYATH, DHARMAVARAM (MANDAL). ANANTAPURAMU-DIST.
BELONGS TO : SRI. BEERE GOPALAKRISHNA, S/O SRI. GAMPALAIAH.

SCALE :1:100

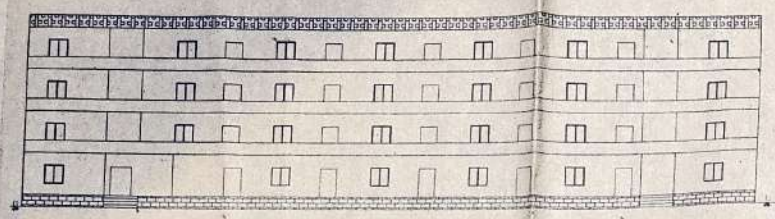

ELEVATION

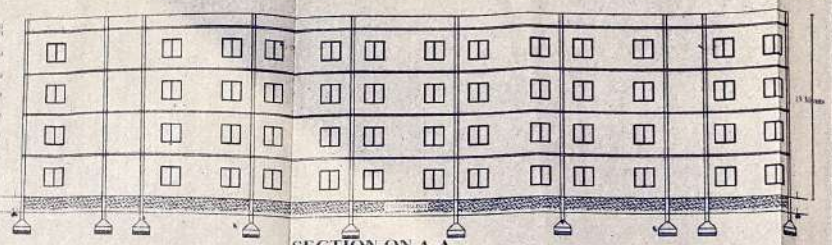

SECTION ON A-A

FIRST FLOOR, SECOND FLOOR & THIRD FLOOR PLAN

GROUND FLOOR PLAN

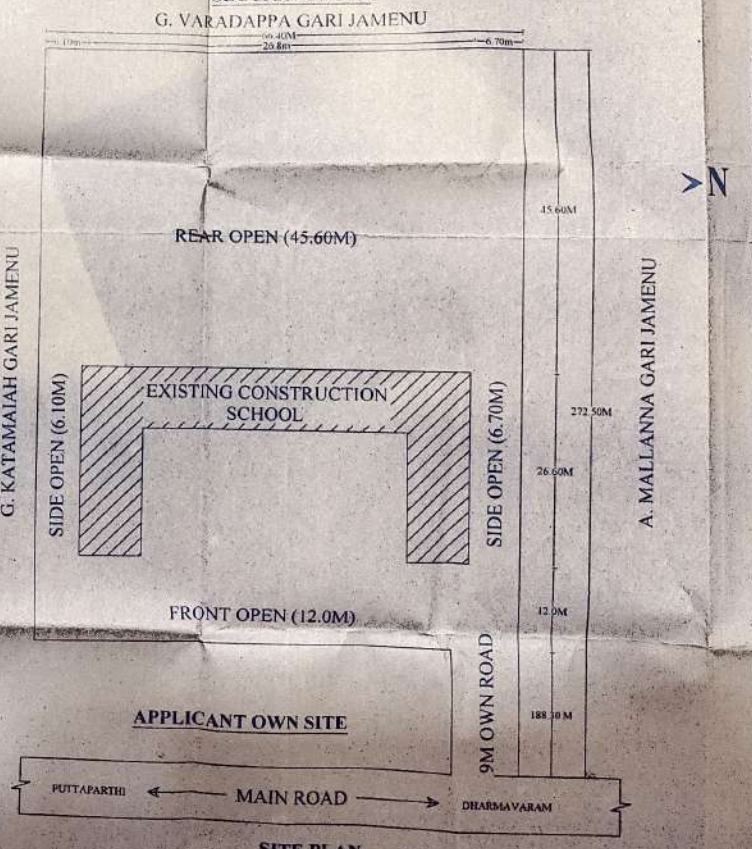


SITE PLAN SCALE 1:200

**SPECIFICATIONS:-**

| | |
|---|---|
| STRUCTURE | :FRAMED |
| FOUNDATION BED | :P.C.C(1:5:10) |
| FOOTINGS, COLUMNS | :R.C.C.1:2:4 |
| SUPER STRUCTURE | :BRICK MASONRY |
| ROOF | :R.C.C (1:2:4) |
| PLASTERING | :C.M.(1:6) |
| FLOORING | :POLISHED SLAB |
| ELECTRIFICATION | :CONCEALED |

HEIGHT OF THE BUILDING: 13.3 Mts FROM F.L.

**AREA STATMENT:-**

| | | |
|---|---|---|
| SITE AREA | : | 18094.00 SMT |
| PLINTH AREA | | |
| GROUND FLOOR | : | 770.56 SMT |
| FIRST FLOOR | : | 770.56 SMT |
| SECOND FLOOR | : | 770.56 SMT |
| THIRD FLOOR | : | 770.56 SMT |
| TOTAL PLINTH AREA | : | 3082.24 SMT |

**REFERENCE:-**

| | | |
|---|---|---|
| D | DOOR | : 1.20 x 2.10 |
| D1 | DOOR | : 0.75 x 2.10 |
| W | WINDOW | :1.37 x 1.37 |
| V | VENTILATOR | :1.37 x 0.65 |

**M.L.S. ENGINEER:-**

BRUNDHAVAN PLANNERS
Civil Consultants & Constructions
Brundhavan Planners, Upstairs Annapurna Modules,
Beside Sudharshan Complex,
DHARMAVARAM-515671

**APPLICANT:-**

Assistant Engineer
(R&B) Section, Dharmavaram

Dy. Executive Engineer
(R&B) Sub-Division
DHARMAVARAM